

► You might also like...

► **Q3 classic**



► **V3 air**



Register your product at
www.suprabeam.com and get
the latest information and news by e-mail

Mistakes and printing errors excepted

Product Overview

Thank you for purchasing our Suprabeam Q1. It combines micro size and extreme power making it ideal for precise and professional use.


We do our best to make the products meet our high standards.

Should you unexpectedly encounter problems with the product, please contact your local Suprabeam dealer.

Dispose this product in an environmentally compatible manner in accordance with national regulations, if in doubt about correct disposal please contact your municipal authority that can provide information about correct disposal.

We highly recommend using Premium type batteries only to ensure high quality light output and long lighting time. We can not guarantee the light data if using battery types of lower quality

To protect the environment, this product is compatible with rechargeable batteries 1.2-1.5V (not Li-Ion 3.7V)

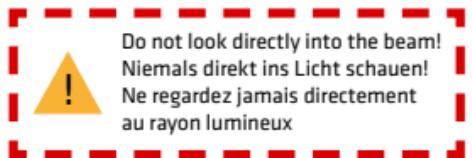

Steiner A/S
P.O. Pedersens Vej 14A · DK-8200 Aarhus N
Phone: +45 87 52 52 12
Fax: +45 87 52 52 15

Contact: info@suprabeam.com · www.suprabeam.com

Warranty and Warnings


suprabeam®




Q1



► Changing Battery

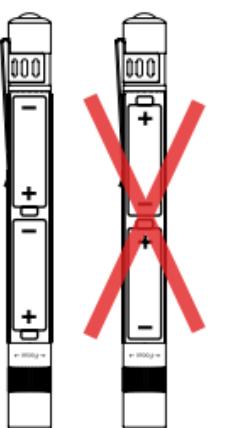


► Rotating Hyperfocus™

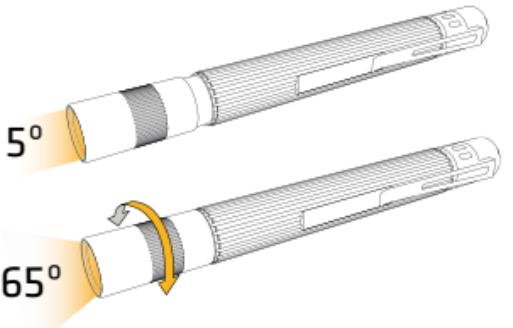

► Operating

PRESS:

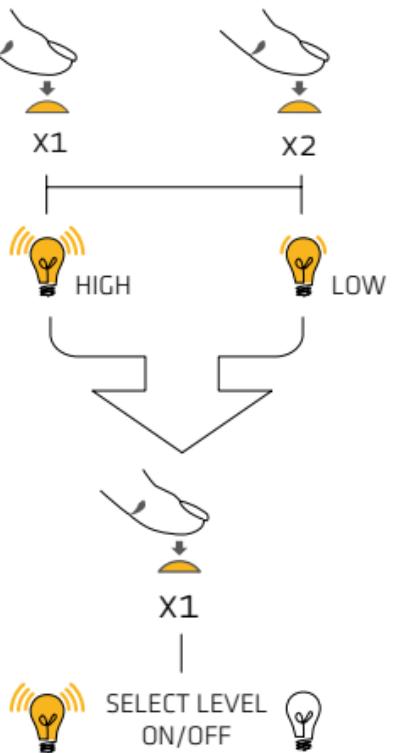


Manual

FOR MORE INFO:



www.suprabeam.com

► Q1



Battery:	2 x AAA Alkaline or NiMh
Beam angle:	Variable_Spot 5°_Flood 65°
Case Material	Anodized Aluminium
Weight:	56 g
Temp.	-20°C to + 50°C
IP Rating	x4
LED Type:	1 CREE LED Chip

► Technical Data